

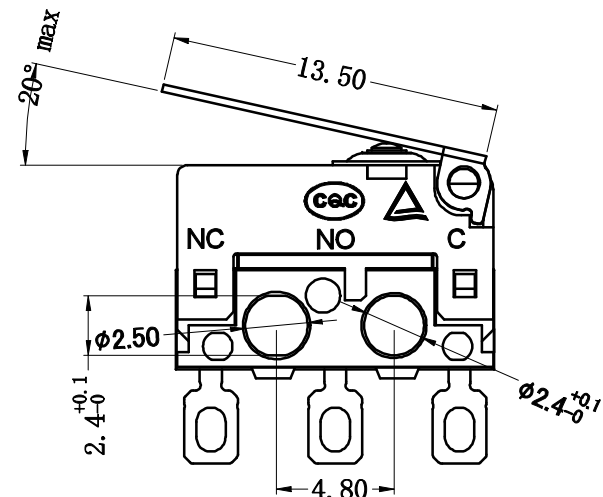
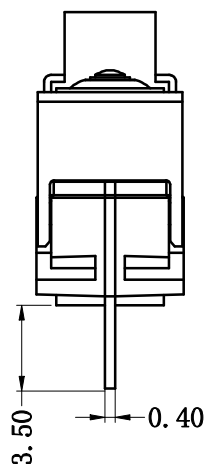
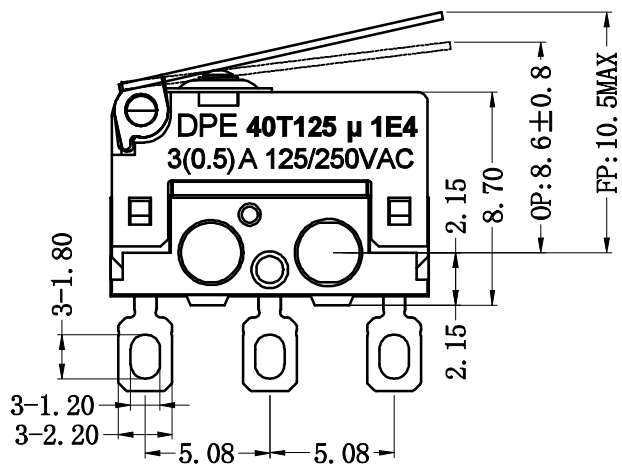


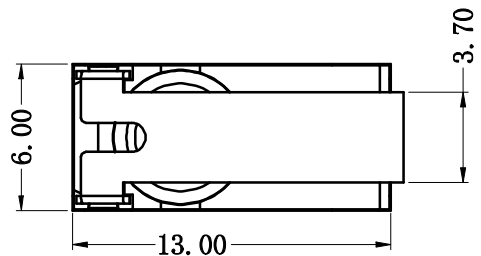

Rating	3A DC48V	Electrical Life	30,000 cycles
	3A 125VAC		10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	50gf max
说明 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外。			

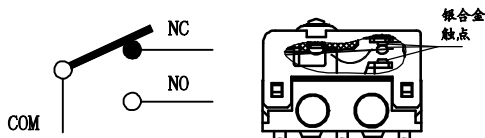

9	压柄	1	SUS	
8	密封垫	1	TPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口铍铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注

Guangdong Tengjun Electronic Technology Co., Ltd

DRAWING NO:

DPE-D-01N

REV A0 SIZE: A4



PART NAME

DP系列 密封型 超小型 微动开关

PART NO.

DPE-D-01N

TOLERANCE UNLESS OTHERWISE SPECIFIED:
X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

1:1

CHECK:

Chen

DATE:

2019.11.12

SHEET

1 / 1

APPROVAL:

Yuan

DATE:

2019.11.12