

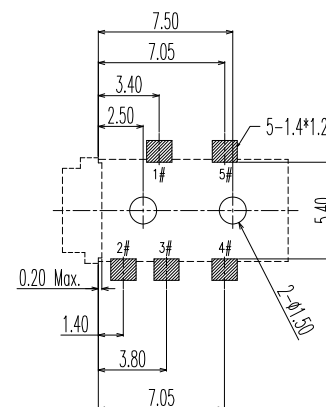






NOTES

1. CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30N.
8. OPERATING TEMPERATURE: -25°C TO +85°C.
9. WATERPROOF LEVEL: IP67






RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

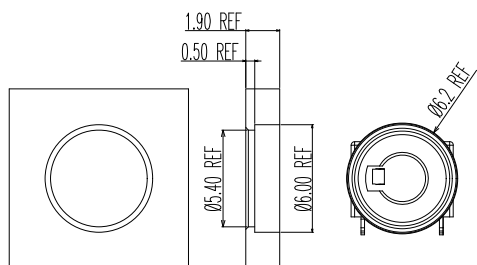

面板开孔参考尺寸

INSTALL WATERPROOF RING
(UNCOMPRESSED)

Not to install the waterproof ring shipment



ITEM	NAME	QTY	DESCRIPTION
9	GLUE	1	EPDXY; BLACK
8	WATERPROOF RING	1	SILICONE; BLACK
7	COVER	1	HIGH TEMPERATURE; BLACK
6	HOUSING	1	HIGH TEMPERATURE; BLACK
5	TERMINAL 5#	1	STAINLESS STEEL; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA
2	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA
1	TERMINAL 1#	1	STAINLESS STEEL; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA

Guangdong Tengjun Electronic Technology Co., Ltd

DRAWING NO:

JA05-BPS001-A



REV A0

SIZE: A4



PART NAME

02.5 PHONE JACK CONNECTOR

PART NO.

JA05-BPS001-A

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

CHECK:

Chen

DATE:

2019.11.12

APPROVAL:

Yuan

DATE:

2019.11.12

SHEET

1/1