



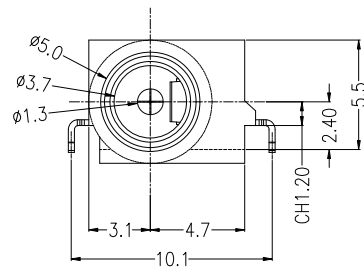

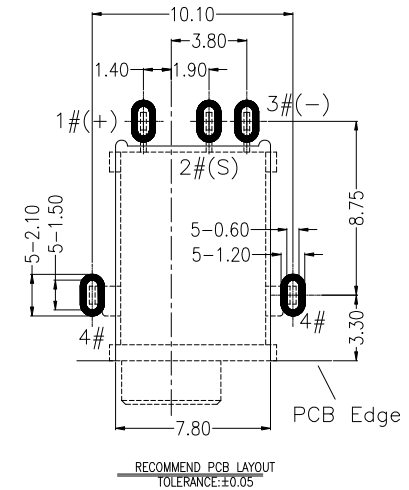
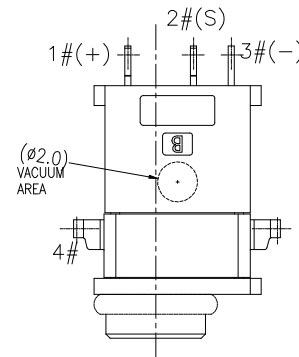
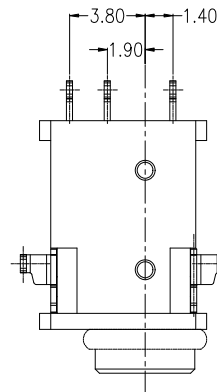


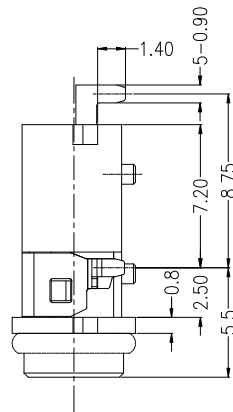


NOTES

1. CURRENT RATING: 24V & 3A MAX.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3N MIN.
PLEASE CONTACT LZG FOR TECHNICAL SUPPORT.
7. CONNECTOR UNMATING FORCES: 35N MAX.
8. OPERATING TEMPERATURE: -25°C TO +85°C.




WHITE WATERPROOF RING

Not to install the waterproof ring shipment



Circuit Diagram



8	WATERPROOF RING	1	SILICONE; WHITE
7	GLUE	1	EPOXY; BLACK
6	BACK COVER	1	HIGH TEMPERATURE; BLACK
5	HOUSING	1	HIGH TEMPERATURE; BLACK
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL PLATING
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON THE SOLDER AREA
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE
1	CENTER PIN	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON THE SOLDER AREA
ITEM	NAME	Q'TY	DESCRIPTION

Guangdong Tengjun Electronic Technology Co., Ltd

DRAWING NO:

JM05-BPF007-A

REV A0

SIZE: A4



PART NAME

01.3 DC WATERPROOF POWER JACK

PART NO.

JM05-BPF007-A

TOLERANCE UNLESS OTHERWISE SPECIFIED:
X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

CHECK:

Chen

DATE:

2019.11.12

APPROVAL:

Yuan

DATE:

2019.11.12

SCALE

1:1

SHEET

1/1