

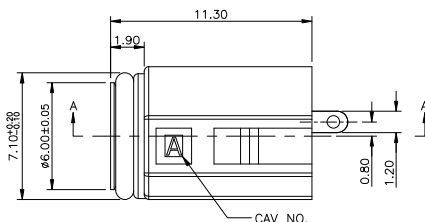








RoHS
Compliant




3D VIEW

NOTES:

1. CONTACT CURRENT RATING:2A;
2. CONTACT RESISTANCE:60mΩ MAX;
3. INSULATION RESISTANCE:100MΩ MIN;
4. DIELECTRIC WITHSTANDING:500V AC MIN;
5. DURABILITY:5,000CYCLES MIN;
6. CONNECTOR MATING FORCES:2.94~29.4N(0.30~3.00Kgf).
PLEASE CONTACT LZG FOR TECHNICAL SUPPORT.;
7. CONNECTOR UNMATING FORCES:2.94~29.4N(0.30~3.00Kgf);
8. WATERPROOF STRENGTH:IP-X7;

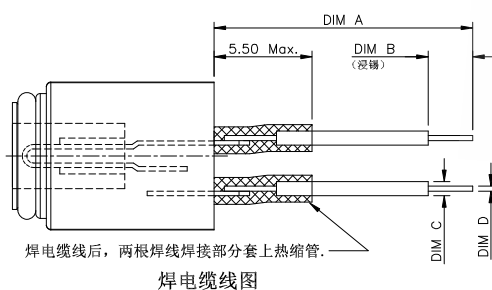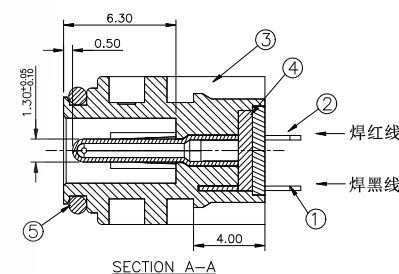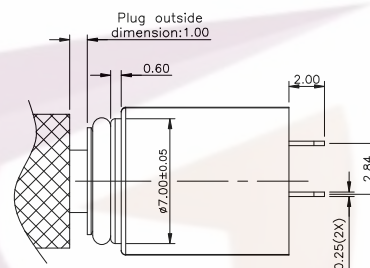

焊电缆线图



SCHEMATIC

TABLE A:

ITEM	PART NUMBER	DIM A	DIM B	DIM C	DIM D
01	DS-0317D00-131-111	14.50±1.50	2.50 ^{+0.80} _{-0.00}	0.80	0.30
02	DS-0317D10-131-110	43.00±1.50	1.00±0.50	1.00	0.48
03	DS-0317D30-131-110	不焊线，客户自己焊线			

01	CONTACT A	1 PCS	STAINLESS STEEL T=0.25	Au Plated
02	PIN	1 PCS	BRASS T=0.25	Au Plated
03	HOUSING	1 PCS	PA66+30%GF	BLACK UL 94V-0
04	COVER	1 PCS	PA66+30%GF	BLACK UL 94V-0
05	O型圈	1 PCS	硅胶	RED UL 94V-0
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME

DC POWER JACK

PART NO.

JM02-BPD012-A

TOLERANCE UNLESS OTHERWISE SPECIFIED:
X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

1/1

SIZE: A4

APPROVAL:

Yuan

DATE:

2019.11.12

