

RoHS Compliant

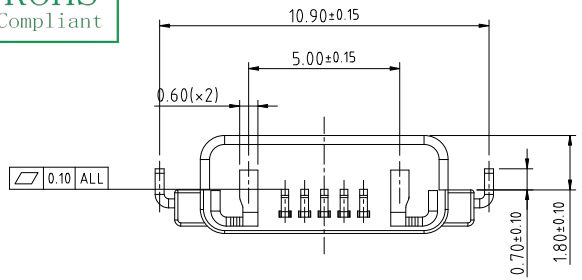




Notes:


1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ▽ & ▼ should be checked by Q.C. and process, engineers and ▽ should also check the CPK data.


IPX6


Specification:


1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

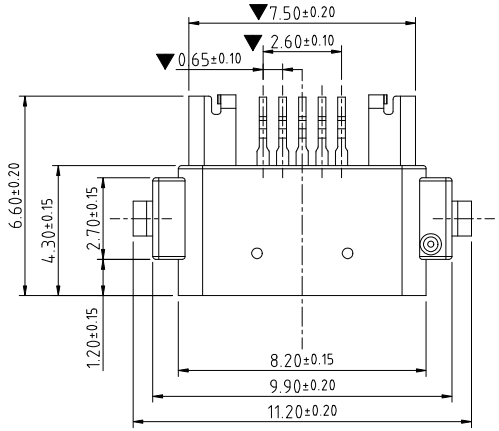

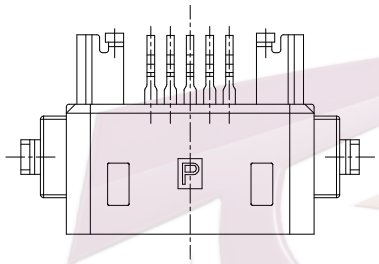

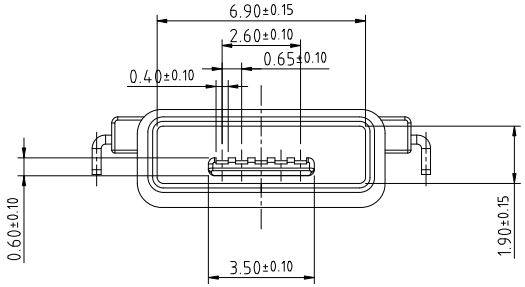



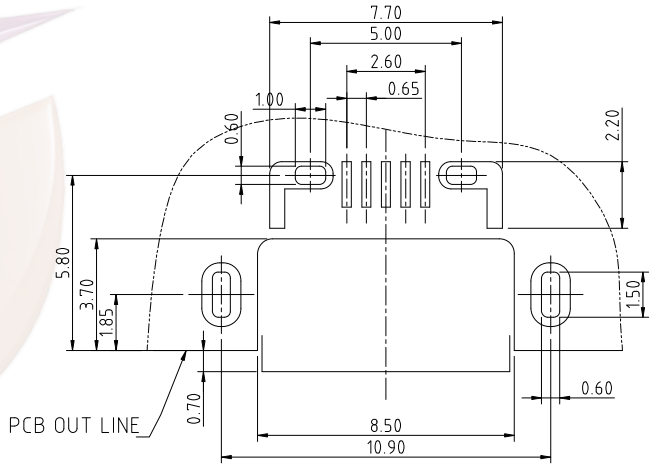

P.C.B LAYOUT

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	C2680R-H Au/Ni PlatingT=0.30mm	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%)	

Guangdong Tengjun Electronic Technology Co., Ltd | Website: https://www.tengjunconn.com | TEL: 0769-23323869

TENGJUN


PART NAME	Micro USB 5Pin SMT Type (AB Type 沉板平口防水型 IP66)
PART NO.	TJ2805FSP000430B6


TOLERANCE UNLESS OTHERWISE SPECIFIED:


X	±0.2
X.X	±0.15
X.XX	±0.10
X.XXX	±0.050


DRAWING:	Li	DATE:	2023.08.07	SCALE	SHEET	REV: A0
CHECK:	Chen	DATE:	2023.08.07	1:1	1/1	SIZE: A4
APPROVAL:	Yuan	DATE:	2023.08.07			


RoHS Compliant

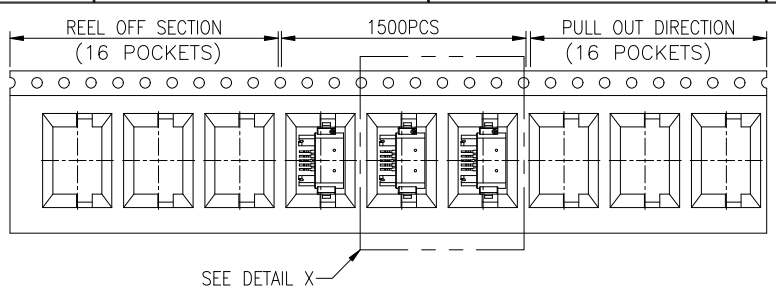


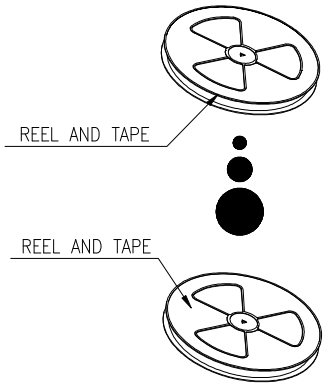

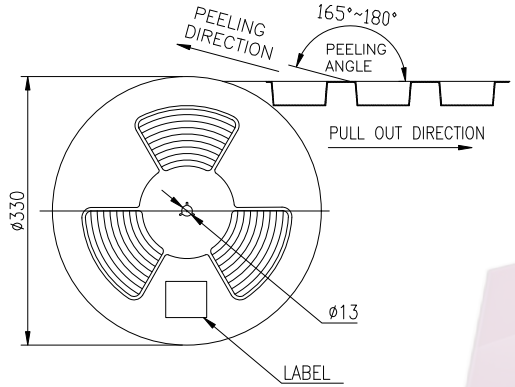





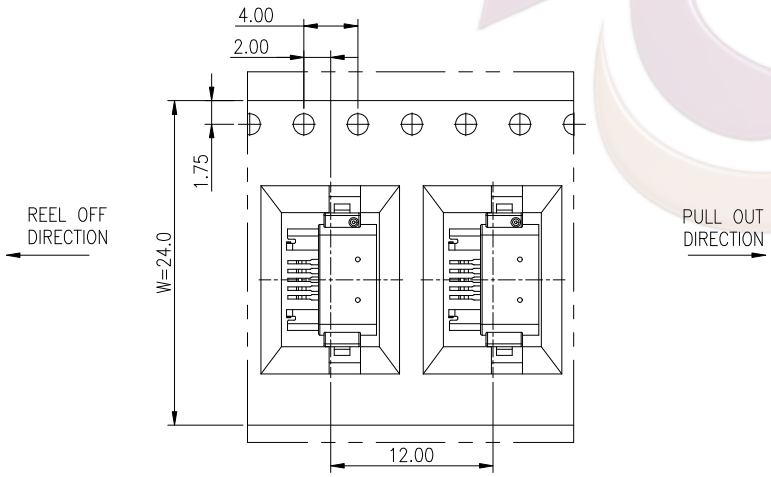

	REEL	CARTON
CONNECTOR (PCS)	1500	15000

Guangdong Tengjun Electronic Technology Co., Ltd	Website:	https://www.tengjunconn.com	TEL:	0769-23323869			
TENGJUN	PART NAME	Micro USB 5Pin SMT Type (AB Type 沉板平口防水型 IP66)	TOLERANCE UNLESS OTHERWISE SPECIFIED: X ±0.2, X.X ±0.15, X.XX ±0.10, X.XXX ±0.050	DRAWING: Li	DATE: 2023.08.07	SCALE 1:1	SHEET 1/1 REV: A0
	PART NO.	TJ2805FSP000430B6		CHECK: Chen	DATE: 2023.08.07		SIZE: A4
				APPROVAL: Yuan	DATE: 2023.08.07		