

RoHS Compliant

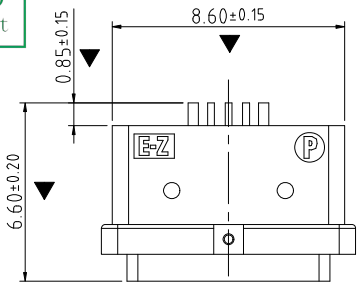





Notes:


1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ▽ & ▼ should be checked by Q.C. and process, engineers and ▽ should also check the CPK data.

Specification:


1. Current Rating: 2.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

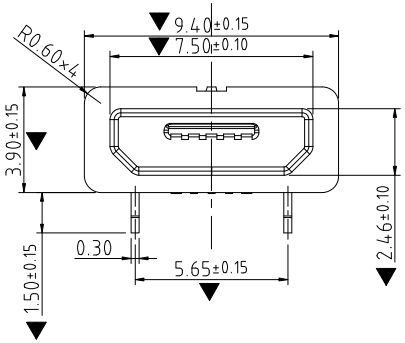


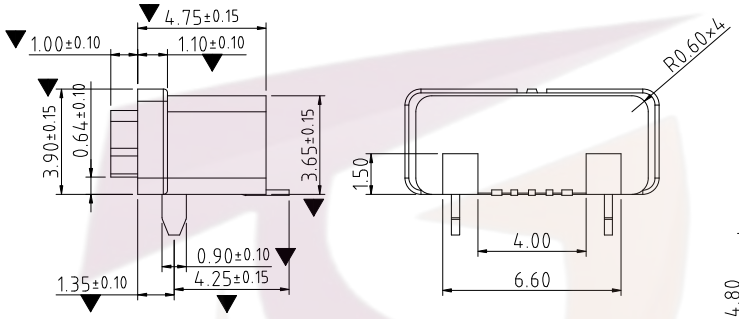

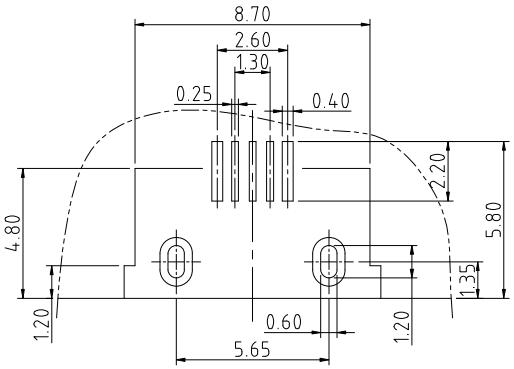

P.C.B LAYOUT

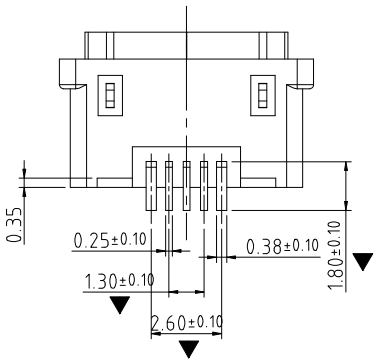

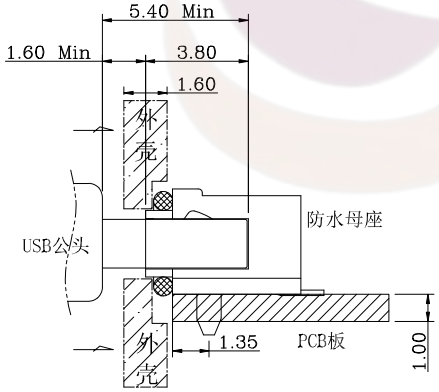

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS304R-1/2H Ni PlatingT=0.30mm	
2	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%)	

Guangdong Tengjun Electronic Technology Co., Ltd	Website:	https://www.tengjunconn.com	TEL: 0769-23323869

TENGJUN

PART NAME	Micro USB 5Pin SMT (B) Type (贴板平口防水型)	TOLERANCE UNLESS OTHERWISE SPECIFIED:	DRAWING:	Li	DATE:	2023.09.18	SCALE	SHEET / REV:A0
PART NO.	TJ2805LSP000475B6	X ±0.2 X.X ±0.15 X.XX ±0.10 X.XXX ±0.050	CHECK:	Chen	DATE:	2023.09.18	1:1	1/1 / SIZE: A4
			APPROVAL:	Yuan	DATE:	2023.09.18		